


CERAMIC FILTERS

CATALOG NO. P-O3-A

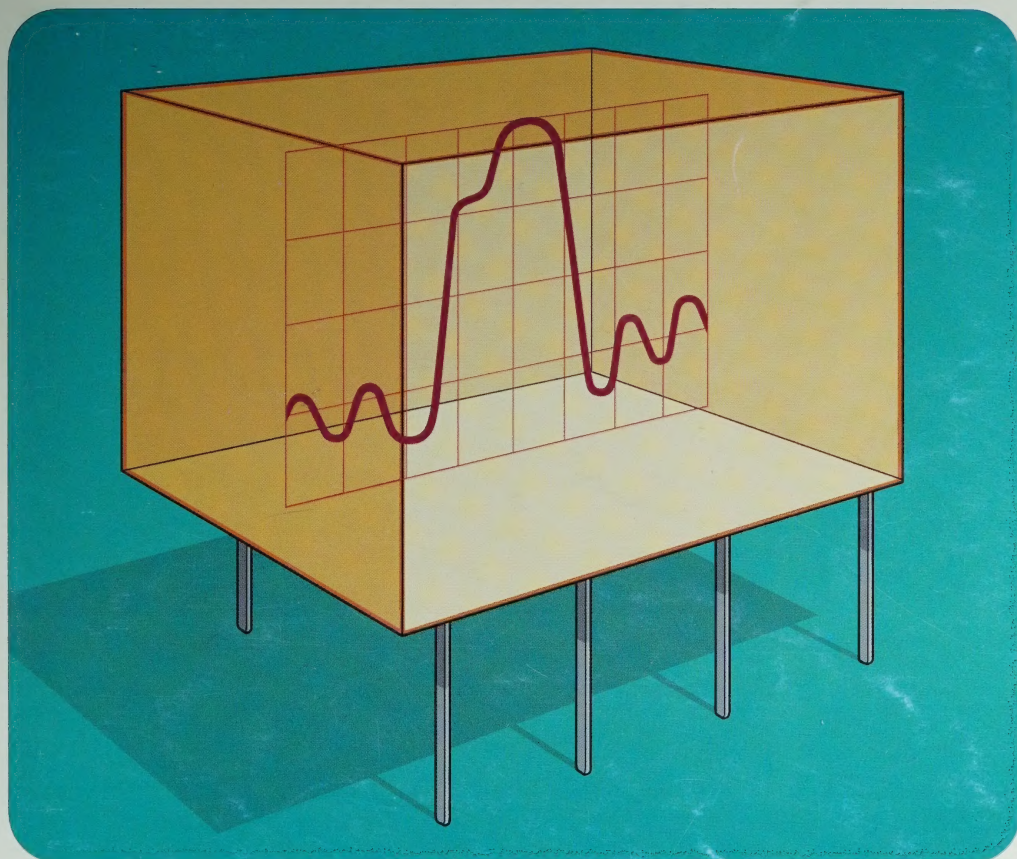

MURATA ERIE NORTH AMERICA

The world's foremost manufacturer of ceramic filters with an unparalleled reputation for quality and performance.

With the rapid growth and increasing sophistication now taking place in all phases of the communications industry, there is a great demand for cost effective band pass filters that offer state-of-the-art performance characteristics such as excellent selectivity, optimum stopband attenuation, a flat band pass characteristic, and high stability.

Calling on over 45 years of experience in the design and manufacture of electronic components, Murata Erie has developed a comprehensive line of ceramic filters that address these demands. Our filters are manufactured from the finest ceramic materials on highly efficient, automated assembly equipment. The end result is a highly consistent product line that has exceptional long-term reliability at the lowest possible cost.

Because Murata Erie's filters are manufactured from readily available quality ceramic materials, they offer the following advantages:

- Small size and lightweight for compact applications
- Excellent temperature characteristics and durability for extreme environments
- Low loss, good waveform symmetry, and high selectivity for solid-state performance devices
- Large volumes and uniformity make these products ideal for mass production designs

For further information on Murata Erie filters or for application assistance, our staff of application engineers in Smyrna, Georgia can provide any technical support that you may require.

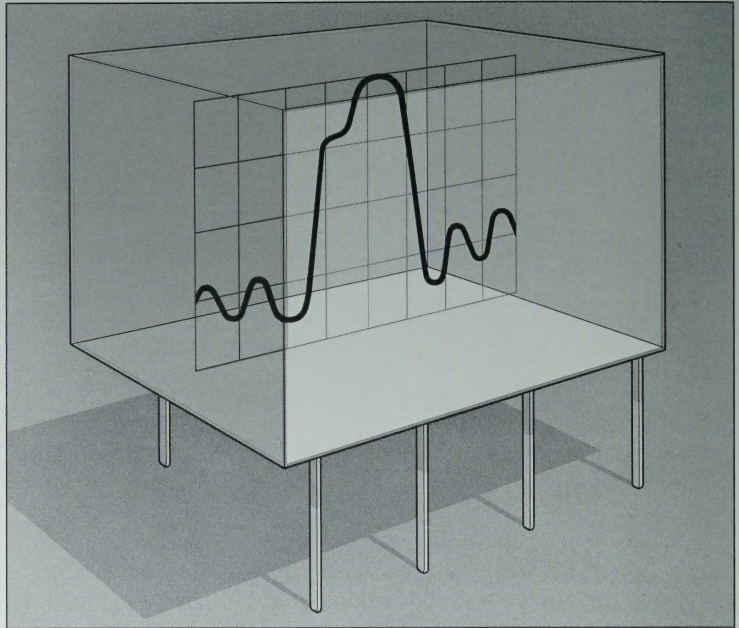


TABLE OF CONTENTS

Pages

Introduction To Ceramic Filters	3-7
Piezoelectric Theory As Applied To Ceramic Filters	3-4
Ceramic Filter Terminology	5
Impedance Matching	5-6
Spurious Response	6
Gain Distribution	6
Coupling Capacitance	7
Group Delay Time Characteristics	7
Multi-Element Ladder Filters For High Selectivity	8-13
Ceramic Discriminators (455KHz)	14
Ceramic Filter Theory and Categorization (10.7MHz)	15
Ceramic Filters (10.7MHz)	16-19
Ceramic Discriminators (10.7MHz)	20
Ceramic Filters (3.58 to 6.5MHz)	21
Ceramic Traps (4.5 to 6.5MHz)	22
Ceramic Discriminators (4.5 to 6.5MHz)	23
Ceramic Filters For Signal Detection (10.7MHz & 450KHz)	24
Ceramic Filters (455KHz)	25
Ceramic Filters For Surface Mount (10.7MHz & 455KHz)	26
Specifications	27

muRata**ERIE**

®

AUTHORIZED DISTRIBUTORS

ALABAMA

Huntsville, AL
Future Electronics
(205) 830-2322

ARIZONA

Phoenix, AZ
Future Electronics
(602) 968-7140
Sterling Electronics
(602) 437-5565

Tempe, AZ

Acacia/Deanco
(602) 894-2874
(602) 882-9054
Time Electronics
(602) 967-2000

CALIFORNIA

Agoura Hills, CA

Time Electronics
(818) 707-2890

Camarillo, CA

Milgray Electronics
(805) 484-4055

Chatsworth, CA

Future Electronics
(818) 772-6240
Passive Technology
(818) 882-2277
Sterling Electronics
(818) 407-8850
Time Electronics
(818) 998-7200

Compton, CA

Harper Sid
(213) 979-5090

Fremont, CA

Acacia/Deanco
(415) 623-7500

Garden Grove, CA

National Electronics Corp.
(800) 854-2451

Inglewood, CA

Newark Electronics, Inc.
(213) 671-7377

Irvine, CA

Acacia/Deanco
(213) 971-2428
(714) 660-0834
Future Electronics
(714) 250-4141

San Diego, CA

Acacia/Deanco
(619) 597-0577
Future Electronics
(619) 278-5020
Harper Sid
(619) 578-2500
Sterling Electronics
(619) 271-6555
Time Electronics
(619) 586-1331

San Jose, CA

Compass Components
(408) 432-7575
Future Electronics
(408) 434-1114
(408) 434-1122
Harper Sid
(408) 943-9490
Passive Technology
(408) 435-5566

Sunnyvale, CA

Capsco Sales, Inc.
(408) 734-3020
Time Electronics
(408) 734-9888

Torrance, CA

Time Electronics
(213) 320-0880

Tustin, CA

Sterling Electronics
(714) 259-0900
Time Electronics
(714) 669-0100

COLORADO

Denver, CO

Newark Electronics
(303) 757-3351

Englewood, CO

Sterling Electronics
(303) 792-3939
Time Electronics
(303) 799-8851

Lakewood, CO

Acacia/Deanco
(303) 232-2882

Westminster, CO

Future Electronics
(303) 421-0123

CONNECTICUT

Bethel, CT

Future Electronics
(203) 743-9594

Milford, CT

Milgray Electronics
(203) 878-5538

Southbury, CT

Time Electronics
(203) 271-3200

Wallingford, CT

Cronin Electronics
(203) 265-3134
Sterling Electronics
(203) 265-9535

FLORIDA

Altamonte Springs, FL

Future Electronics
(407) 767-8414

Clearwater, FL

Future Electronics
(813) 578-2770

Fort Lauderdale, FL

Time Electronics
(305) 484-7778

Orlando, FL

Time Electronics
(407) 841-6565
Winter Park, FL
Milgray Electronics
(407) 647-5747

GEORGIA

Augusta, GA

Dixie Electronics
(404) 722-2055

Concord, GA

Dixie Electronics
(404) 495-5916

Norcross, GA

Future Electronics
(404) 441-7676
Milgray Electronics
(404) 446-9777
Time Electronics
(404) 448-4448

ILLINOIS

Arlington Heights, IL

Milgray Electronics
(708) 253-1212

Bensenville, IL

Gould Electronics Corp.
(708) 860-7171

Chicago, IL

Newark Electronics
(708) 784-5100

Rosemont, IL

Advent Electronics, Inc.
(708) 297-6200

Schaumburg, IL

Future Electronics
(708) 882-1255
Time Electronics
(708) 303-3000

INDIANA

Indianapolis, IN

Advent Electronics, Inc.
(317) 872-4910

IOWA

Cedar Rapids, IA

Advent Electronics, Inc.
(319) 363-0221

KANSAS

Lenexa, KS

Sterling Electronics
(913) 492-5406

Overland Park, KS

Milgray Electronics
(913) 236-8800

MARYLAND

Baltimore, MD

Resco (Baltimore)
(301) 931-8200

Beltville, MD

Resco (Washington)
(301) 937-9100

Columbia, MD

Future Electronics
(301) 290-0600
Milgray Electronics
(301) 621-8169
Sterling Electronics
(301) 290-3800
Time Electronics
(301) 964-3090

MASSACHUSETTS

Hopkinton, MA

Interface Electronics Corp.
(508) 435-6858

Needham, MA

Cronin Electronics
(617) 449-5000

Peabody, MA

Time Electronics
(508) 532-6200

Westborough, MA

Future Electronics
(508) 366-2400

Wilmington, MA

Milgray Electronics
(508) 657-5900

Woburn, MA

Sterling Electronics
(617) 938-6200

MICHIGAN

Farmington Hills, MI

Advent Electronics, Inc.
(313) 477-1650

Livonia, MI

Future Electronics
(313) 261-5270

Oak Park, MI

Newark Electronics
(313) 967-0600

MINNESOTA

Eden Prairie, MN

Future Electronics
(612) 944-2200

Edina, MN

Time Electronics
(612) 835-1250

Minneapolis, MN

Aero-Space Computer Supplies, Inc.
(612) 884-4725
Newark Electronics
(612) 331-6350
Sterling Electronics
(612) 831-2666

MISSOURI

Manchester, MO

Time Electronics
(314) 391-6444

St. Louis, MO

Future Electronics
(314) 469-6805

AUTHORIZED DISTRIBUTORS

NEW HAMPSHIRE

Manchester NH
Cronin Electronics
(603) 624-0105

NEW JERSEY

Edison, NJ
Sterling Electronics
(908) 417-1000
Marlton, NJ
Milgray Electronics
(609) 983-5010
Time Electronics
(609) 596-6700

Mt. Laurel, NJ
Future Electronics
(609) 778-7600
Parsippany, NJ
Milgray Electronics
(201) 335-1766
Future Electronics
(201) 299-0400

Pine Brook, NJ
Time Electronics
(201) 882-4611
Rockaway, NJ
Tonar Industries
(201) 586-9000

NEW MEXICO
Albuquerque, NM
Sterling Electronics
(505) 884-1900

NEW YORK
Farmingdale, NY
Milgray Electronics
(516) 420-9800

Hauppauge, NY
Future Electronics
(516) 234-4000
Time Electronics
(516) 273-0100

Liverpool, NY
Future Electronics
(315) 451-2371

Pittsford, NY
Milgray Electronics
(716) 381-9700

Rochester, NY
Future Electronics
(716) 272-1120

E. Syracuse, NY
Time Electronics
(315) 432-0355

NORTH CAROLINA

Charlotte, NC
Dixie Electronics
(704) 377-4348
Electronics Marketing Corp.
(704) 394-6195
Time Electronics
(704) 522-7600

Oxford, NC
Time Electronics
(919) 693-5166
Raleigh, NC
Future Electronics
(919) 790-7111
Milgray Electronics
(800) 562-3118
(919) 790-8094
Winston Salem, NC
Dixie Electronics
(919) 724-5961

OHIO
Cleveland, OH
Milgray Electronics
(216) 447-1520
Columbus, OH
Electronics Marketing Corp.
(614) 299-4161
Dublin, OH
Time Electronics
(614) 761-1100
Highland Heights, OH
Electronics Marketing Corp.
(216) 442-3441
Kettering, OH
Electronics Marketing Corp.
(513) 439-4711
Valleyview, OH
Newark Electronics
(216) 447-8860

OKLAHOMA
Tulsa, OK
Sterling Electronics
(918) 663-2410

OREGON
Beaverton, OR
Acacia/Deanco
(503) 646-3377
Future Electronics
(503) 645-9454
Portland, OR
Time Electronics
(503) 684-3780
Tualatin, OR
Moore Electronics
(503) 692-5333

PENNSYLVANIA
Malvern, PA
Interface Electronics
(215) 889-2060

SOUTH CAROLINA
Columbia, SC
Dixie Electronics
(803) 779-5332
Greenville, SC
Dixie Electronics
(803) 297-1430
North Charleston, SC
Dixie Electronics
(803) 552-2671

TENNESSEE

Gray, TN
Dixie Electronics
(615) 477-2131
Oak Ridge, TN
Dixie Electronics
(615) 481-3393

TEXAS
Austin, TX
Sterling Electronics
(512) 836-1341
Time Electronics
(512) 339-3051
Carrollton, TX
Sterling Electronics
(214) 243-1600
Dallas, TX
Milgray Electronics
(214) 248-1603
Garland, TX
Newark Electronics
(214) 487-8144
Houston, TX
Newark Electronics
(713) 270-4800
Sterling Electronics
(713) 623-6600

Irving, TX
Harper Sid
(214) 621-0500
Richardson, TX
Future Electronics
(214) 437-2437
Time Electronics
(214) 644-4644

UTAH
Salt Lake City, UT
Future Electronics
(801) 972-8489
Milgray Electronics
(801) 272-4999
Sterling Electronics
(801) 972-5444
Time Electronics
(801) 973-8181

VIRGINIA
Richmond, VA
Sterling Electronics
(804) 226-2190

WASHINGTON
Redmond, WA
Acacia/Deanco
(206) 881-5566
Future Electronics
(206) 881-8199
Time Electronics
(206) 882-1600
WISCONSIN
Mequon, WI
Taylor Electric Co., Inc.
(414) 241-4321

Yaukesha, WI
Future Electronics
(414) 786-1884

CANADIAN DISTRIBUTORS

ALBERTA
Calgary, AB
Zentronics
(403) 295-8838
Edmonton, AB
Zentronics
(403) 484-1669

BRITISH COLUMBIA
Vancouver, BC
Future Electronics
(604) 294-1166
Zentronics
(604) 273-5575

MANITOBA
Winnipeg, MB
Zentronics
(204) 694-1957

ONTARIO
Downsview, ON
Future Electronics
(416) 638-4771

Mississauga, ON
Time Electronics
(416) 672-5300
Zentronics
(416) 564-9600

Nepean, ON
Carsten
(613) 726-9250
Zentronics

(613) 226-8840
Ottawa, ON
Future Electronics
(613) 820-8313

Scarborough, ON
Carsten
(416) 495-9999

Willowdale, ON
Milgray Electronics
(416) 756-4481

QUEBEC
Montreal, QU
Future Electronics
(514) 694-7710

St. Foy, QU
Zentronics
(418) 654-1077
St. Laurent, QU
Carsten
(514) 334-8321
Tonar Industries
(514) 286-4061
Zentronics
(514) 737-9700



MURATA ERIE NORTH AMERICA

©1990, MURATA ERIE NORTH AMERICA, INC.

2200 Lake Park Drive
Smyrna, Georgia 30080
Tel: 404-433-7820
Telex: 26-1301
Panafax: 404-436-8738

For more than two decades, ceramic filter technology has been instrumental in the proliferation of solid state electronics. A view of the future reveals that even greater expectations will be placed on piezoelectric material in the area of new applications and for more stringent performance criteria in current products. Traditionally, nearly all low and high-end AM and FM commercial radios use ceramic bandpass filters. However, applications are also found in cordless telephones, cellular systems, 2-way communications, and the television industry.

As a world leader in the development of piezo ceramic filter technology, Murata ERIE has been able to develop specialized ceramic materials which when combined with an advanced filter design have resulted in a complete line of practical, inexpensive ceramic filters for entertainment and communications applications. In this catalog, the principle of ceramic filters, the design of representative test circuits and

specifications concerning various models are described.

PIEZOELECTRIC THEORY AS APPLIED TO CERAMIC FILTERS

All ceramic filters derive their basic frequency selectivity from a mechanical vibration resulting from a piezoelectric effect. While a total theoretical analysis of piezoelectric technology as applied to ceramic filters is very complex, it can be shown as the equivalent circuit as illustrated in Figure 1. This equivalent circuit represents a typical two-terminal filter, a device which forms the basic building block for more complex filters.

The resonant frequency of this device is calculated by the equation:

$$f_r = \frac{1}{2\pi\sqrt{L_1 C_1}}$$

The anti-resonant frequency is expressed as:

$$f_a = \frac{1}{2\pi\sqrt{L_1 \frac{C_1 C_0}{C_1 + C_0}}}$$

This filter exhibits the impedance characteristics shown in Figure 2.

Two-terminal filters are typically used as emitter bypasses and they exhibit the frequency characteristics shown in Figure 3.

Three-terminal ceramic filters can be used as inter-stage coupling devices as shown in Figure 4. By using our filters in this manner, increased selectivity, improved band pass characteristics, reliability and stability can be obtained without increasing circuit complexity or parts count.

By cascading two or more filters as shown in Figures 4, 5 and 6, Murata ERIE can greatly enhance selectivity. By controlling the coefficient of electromechanical coupling between the filter elements, bandwidth can be "peaked" or "flattened." Typical 455KHz response curves are shown in Figures 7 and 8.

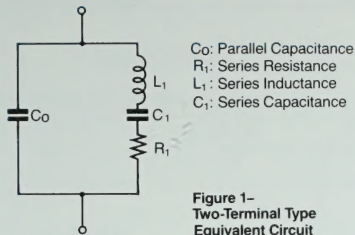


Figure 1—
Two-Terminal Type
Equivalent Circuit

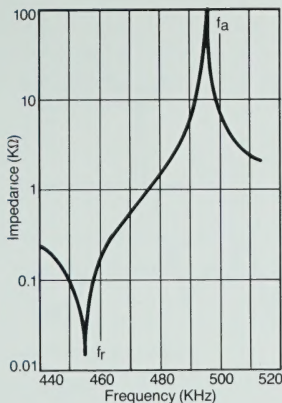


Figure 2—
Typical Impedance vs
Frequency Response Curve For
A Two-Terminal Device




Figure 3—
Typical Attenuation Characteristics
For A 455KHz (Two-Terminal)
Ceramic Filter

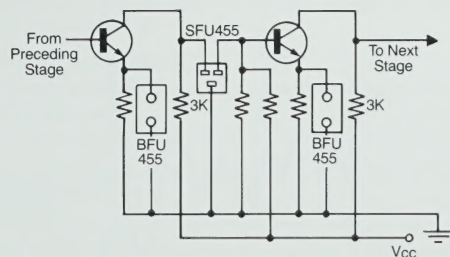


Figure 4—
Three-Terminal Ceramic
Filter Used As Inter-Stage
Coupling Device

INTRODUCTION TO CERAMIC FILTERS




Figure 5—
Ladder Connection




Figure 6—
Cascade Connection

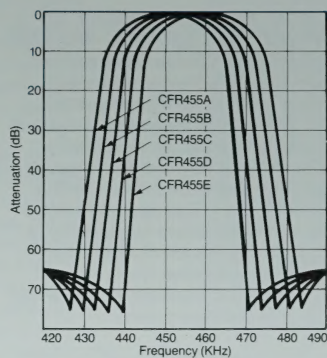


Figure 7—
Typical Response Curves For CFR455 A-E Series
Ceramic Filters

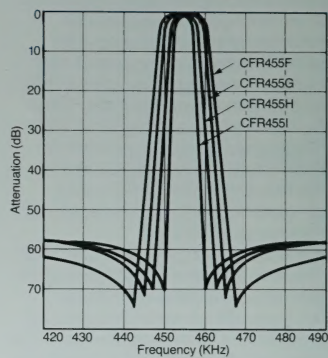


Figure 8—
Typical Response Curves For CFR455 F-I Series
Ceramic Filters

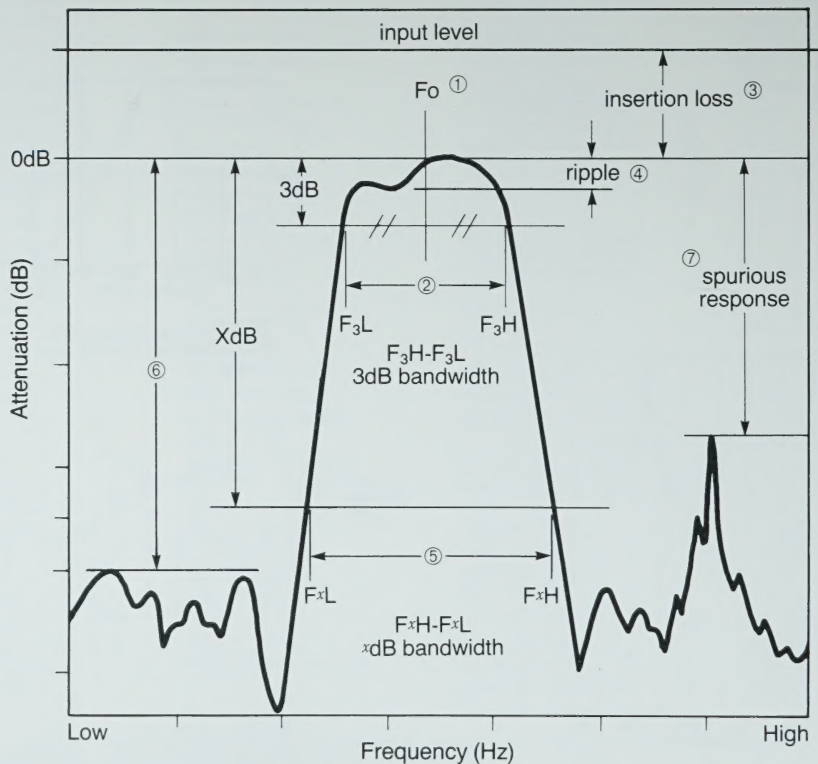


Figure 9—
Graphical Representation of Ceramic Filter Terminology

CERAMIC FILTER TERMINOLOGY

Although the previous section has presented a concise discussion of piezo-electric theory as applied to ceramic filter technology, it is necessary that the respective terminology used in conjunction with ceramic filters be discussed before any further examination of ceramic filter technology is made.

Using Figure 9 as a typical model of a response curve for a ceramic filter, it can be seen that there are a number of relevant factors to be considered in specifying ceramic filters. These include: center frequency, pass-bandwidth, insertion loss,

ripple, attenuation bandwidth, stopband attenuation, spurious response and selectivity. Although not all of these factors will apply to each filter design, these are the key specifications to consider with most filters. From the symbol key shown in Table 1 below, a thorough understanding of this basic terminology should be possible.

IMPEDANCE MATCHING

As it is imperative to properly match the impedances whenever any circuit is connected to another circuit, any component to another component, or any circuit to another component, it is also

important that this be taken into account in using ceramic filters. Without proper impedance matching, the operational characteristics of the ceramic filters cannot be met.

Figure 12 illustrates a typical example of this requirement.

This example shows the changes produced in the frequency characteristics of the SFZ455A ceramic filter when the resistance values are altered. For instance, if the input/output impedances R_1 and R_2 are connected to lower values than those specified, the insertion loss increases, the center frequency shifts toward the low side and the ripple increases.

TABLE 1 - CERAMIC FILTER TERMINOLOGY CHART

Numbers In Fig. 9	Terminology	Symbol	Unit	Explanation of Term
1	Center Frequency	f_0	Hz	The frequency in the center of the pass-bandwidth. However, the center frequency for some products is expressed as the point where the loss is at its lowest point.
2	Pass-bandwidth (3dB Bandwidth)	(3dB) B.W.	Hz	Signifies a difference between the two frequencies where the attenuation becomes 3dB from the level of the minimum loss point.
3	Insertion Loss	I.L.	dB	Expressed as the input/output ratio at the point of minimum loss. (The insertion loss for some products is expressed as the input/output ratio at the center frequency.) Insertion loss = $20 \text{ LOG } (V_2/V_1)$ in dB.
4	Ripple	—	dB	If there are peaks and valleys in the pass-bandwidth, the ripple expresses the difference between the maximum peak and the minimum valley.
5	Attenuation Bandwidth (dB Bandwidth)	(20dB) B.W.	Hz	The bandwidth at a specified level of attenuation. Attenuation may be expressed as the ratio of the input signal strength to the output signal strength in decibels.
6	Stopband Attenuation	—	dB	The level of signal strength at a specified frequency outside of the passband.
7	Spurious Response	SR	dB	The difference in decibels between the insertion loss and the spurious signal in the stopband.
	Input/Output Impedance	—	Ohm	Internal impedance value of the input and output of the ceramic filter.
	Selectivity	—	dB	The ability of a filter to pass signals of one frequency and reject all others. A highly selective filter has an abrupt transition between a passband region and the stopband region. This is expressed as the shape factor—the attenuation bandwidth divided by the pass-bandwidth. The filter becomes more selective as the resultant value approaches one.

INTRODUCTION TO CERAMIC FILTERS

On the other hand, if R_1 and R_2 are connected to higher values other than those specified, the insertion loss will increase, the center frequency will shift toward the high side and the ripple will increase.

DEALING WITH SPURIOUS RESPONSE

Frequently in using 455 KHz filters, spurious will cause problems due to the fact that the resonance occurs under an alien vibrating mode or overtone deviating from the basic vibration characteristics. Among available solutions for dealing with spurious response are:

1. The use of a supplementary IFT together with the ceramic filter for suppression of the spurious.
 2. The arrangement of two or more ceramic filters in parallel for the mutual cancellation of spurious.
 3. The addition of a low-pass or high-pass LC filter for suppression of spurious.
- Perhaps the most commonly used

method of dealing with spurious is the use of a supplementary IFT in conjunction with the ceramic filter. The before and after effects of the use of an IFT are shown in Figures 10 and 11. In Figure 10, only a single SFZ455A ceramic filter is employed and spurious is a significant problem. With the addition of an IFT, the spurious problem is reduced as is shown in Figure 11.

Although spurious is a significant problem to contend with when using 455KHz ceramic filters, it is not a problem in 4.5MHz and 10.7 MHz ceramic filters, as their vibration modes are significantly different.

CONSIDERATIONS FOR GAIN DISTRIBUTION

Since the impedance of both the input and output values of the ceramic filters are symmetric and small, it is necessary that the overall gain distribution within the circuit itself be taken into consideration. For instance, in the discussion concerning

proper impedance matching, it was illustrated that a certain DC loss occurs if the recommended resistance values are not used. This can cause an overall reduction in the gain which could present a problem if no allowances have been made for the corresponding loss. To compensate for this problem, it is recommended that the following be done:

1. The amplifier stage should be designed to compensate for this loss.
2. The ceramic filter should be used in combination with the IFT for minimizing both matching and DC losses. The IFT should be used strictly as a matching transformer and the ceramic filter only for selectivity.

As the use of IC's has become more prevalent with ceramic filters, these considerations have been taken into account. It should be noted that few of the problems discussed above have been realized when more than three (3) IF stages have been employed.




Figure 10—
Spurious Response With Model SFZ455A
Ceramic Filter




Figure 11—
Spurious Response With Model SFZ455A
Ceramic Filter And IFT

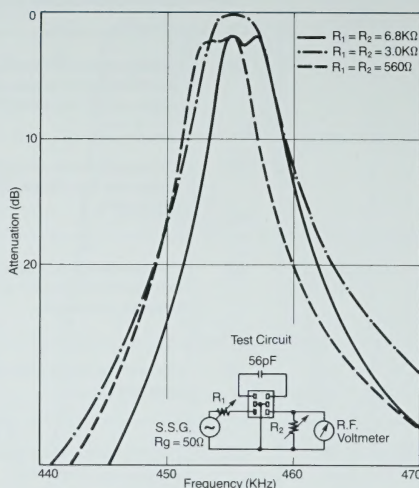


Figure 12—
Model SFZ455A Ceramic Filter
Matching Impedance vs. Pass-
Band Characteristics

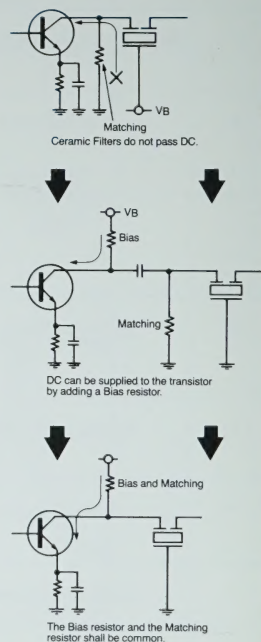


Figure 13—
Coupling With A Transistor

CERAMIC FILTERS DO NOT PASS DC

It is important to note in designing circuits that ceramic filters are incapable of passing DC. As is illustrated in Figure 13, in a typical circuit where a transistor is used, a bias circuit will be required to drive the transistor. Since the ceramic filter requires matching resistance to operate properly, the matching resistor shown in the diagram can play a dual role as both a matching and bias resistor.

If the bias circuit is used, it is important that the parallel circuit of both the bias resistance and the transistor's internal resistance be taken into consideration in meeting the resistance values. This is necessary since the internal resistance of the transistor is changed by the bias resistance. However, when an IC is used, there is no need for an additional bias circuit since the IC has a bias circuit within itself.

Here it is recommended that an IFT be used for impedance matching with the ceramic filter when coupling with a mixer stage, as shown in Figure 14.




Figure 14—
Coupling From Mixer Stage

COUPLING CAPACITANCE

The SFZ455A is composed of two filter elements which must be connected by a coupling capacitor. Moreover, the frequency characteristic changes according to the coupling capacitance (C_c). As shown in Figure 15, the larger the coupling capacitance (C_c) becomes, the wider the bandwidth and more the ripple increases. Conversely, the smaller the coupling capacitance becomes, the narrower the bandwidth becomes and the more the insertion loss increases. Therefore, the specified value of the coupling capacitance in the catalog is desired in determining the specified passband characteristics.

GROUP DELAY TIME CHARACTERISTICS

Perhaps one of the most important characteristics of a transmitting element is to transmit a signal with the lowest possible distortion level. This distortion occurs when the phase shift of a signal which passes through a certain transmitting path is non-linear with respect to the frequency. For convenience, the group

delay time (GDT) characteristic is used for the purpose of expressing non-linearity.

It is important to note the relationship between the amplitude and the GDT characteristics when using group delay time terminology. This relationship differs depending upon the filter characteristics. For example, in the Butterworth type, which has a relatively flat top, the passband is flat while the GDT characteristic is extremely curved, as shown in Figure 16. On the other hand, a Gaussian type, is curved in the passband, while the GDT characteristic is flat. With the flat GDT characteristics, the Gaussian type has excellent distortion characteristics.

Since the amplitude characteristics for the Butterworth type is flat in the passband the bandwidth does not change even at a low input level. With the amplitude characteristic for the Gaussian type being curved in the passband, the bandwidth becomes narrow at a low input level and the sensitivity is poor. Therefore, it should be noted that the Gaussian type has a desirable distortion factor while the Butterworth type has the desirable sensitivity.



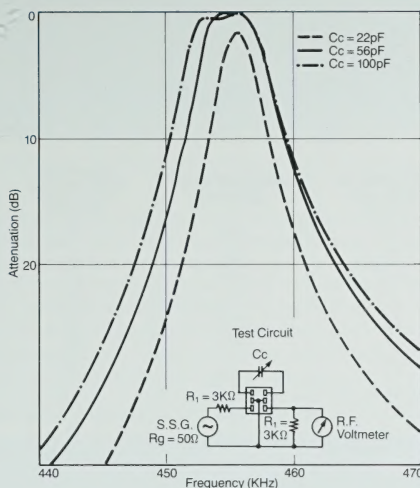


Figure 15—
Model SFZ455A Ceramic Filter
Coupling Capacitance vs. Passband
Characteristics



(A) Butterworth Characteristics




(B) Gaussian Characteristics

Figure 16—
Relationship Between Amplitude
And GDT Characteristics

MULTI-ELEMENT, RESIN MOLDED, HIGHLY SELECTIVE CERAMIC FILTERS

CFU/CFW 455 KHz

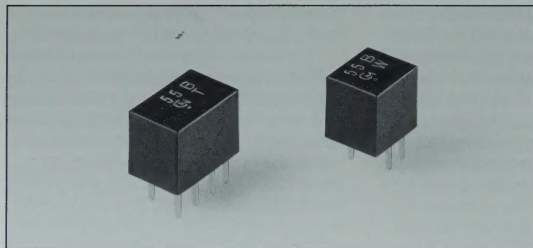


The CFU 455 line of ceramic filters are 4-element devices connected in ladder form while the CFW 455 line of ceramic filters contain 6-elements. These compact, highly selective filters are recommended for use in applications ranging from two-way radio to auxiliary filters in high class transceivers.

SPECIFICATIONS


CFU 455 KHz

Part Number	Nominal Center Frequency (KHz)	6dB Bandwidth (KHz) min.	40dB Bandwidth (KHz) max.	Attenuation 455±100 KHz (dB) min.	Insertion Loss (dB) max.	Input/Output Impedance (Ω)
CFU455B2	455±2	±15	±30	27	4	1500
CFU455C2	455±2	±12.5	±24	27	4	1500
CFU455D2	455±1.5	±10	±20	27	4	1500
CFU455E2	455±1.5	±7.5	±15	27	6	1500
CFU455F2	455±1.5	±6	±12.5	27	6	2000
CFU455G2	455±1	±4.5	±10	25	6	2000
CFU455H2	455±1	±3	±9	25	6	2000
CFU455I2	455±1	±2	±7.5	25	6	2000
CFU455HT	455±1	±3	±9	35	6	2000
CFU455IT	455±1	±2	±7.5	35	6	2000


DIMENSIONS (mm)



CIRCUIT



CHARACTERISTICS




SPECIFICATIONS


CFW 455 KHz

Part Number	Nominal Center Frequency (KHz)	6dB Bandwidth (KHz) min.	40dB Bandwidth (KHz) max.	Attenuation 455±100 KHz (dB) min.	Insertion Loss (dB) max.	Input/Output Impedance (Ω)
CFW455B	455±2	±15	±30	35	4	1500
CFW455C	455±2	±12.5	±24	35	4	1500
CFW455D	455±2	±10	±20	35	4	1500
CFW455E	455±2	±7.5	±15	35	6	1500
CFW455F	455±2	±6	±12.5	35	6	2000
CFW455G	455±2	±4.5	±10	35	6	2000
CFW455H	455±2	±3	±9	35	6	2000
CFW455I	455±2	±2	±7.5	35	7	2000
CFW455HT	455±2	±3	±9	60	6	2000
CFW455IT	455±2	±2	±7.5	60	7	2000


DIMENSIONS (mm)



CIRCUIT



CHARACTERISTICS



MULTI-ELEMENT ULTRA-MINIATURE CERAMIC FILTERS



CFUM/CFWM 455 KHz

The CFUM 455 and CFWM 455 lines of ceramic filters are miniaturized versions of the CFU/CFW lines. These ultra-miniature versions consume approximately 40% less volume while still offering the same high performance filter characteristics available with the CFU/CFW lines.


SPECIFICATIONS

CFUM 455 KHz


Part Number	Nominal Center Frequency (KHz)	6dB Bandwidth (KHz) min.	40dB Bandwidth (KHz) max.	Attenuation 455±100 KHz (dB) min.	Insertion Loss (dB) max.	Input/Output Impedance (Ω)
CFUM455B	455±2	±15	±30	27	4	1500
CFUM455C	455±2	±12.5	±24	27	4	1500
CFUM455D	455±1.5	±10	±20	27	4	1500
CFUM455E	455±1.5	±7.5	±15	27	6	1500
CFUM455F	455±1.5	±6	±12.5	27	6	2000
CFUM455G	455±1	±4.5	±10	25	6	2000
CFUM455H	455±1	±3	±9	35	6	2000
CFUM455I	455±1	±2	±7.5	35	7	2000

• CFUM455 series filters are 4-element ceramic filters and ultraminiature versions of CFU455 series.

DIMENSIONS (mm)




CIRCUIT



$$R_g + R_1 = R_2 = \text{Input/Output Impedance}$$

1 = INPUT
3,4 = GND
2 = OUTPUT

CHARACTERISTICS




SPECIFICATIONS

CFWM 455 KHz


Part Number	Nominal Center Frequency (KHz)	6dB Bandwidth (KHz) min.	50dB Bandwidth (KHz) max.	Attenuation 455±100 KHz (dB) min.	Insertion Loss (dB) max.	Input/Output Impedance (Ω)
CFWM455B	455±2	±15	±30	35	4	1500
CFWM455C	455±2	±12.5	±24	35	4	1500
CFWM455D	455±2	±10	±20	35	4	1500
CFWM455E	455±2	±7.5	±15	35	6	1500
CFWM455F	455±2	±6	±12.5	35	6	2000
CFWM455G	455±2	±4.5	±10	35	6	2000
CFWM455H	455±2	±3	±9	55	6	2000
CFWM455I	455±2	±2	±7.5	55	7	2000

• CFWM455 series filters are 6-element ceramic filters and ultraminiature versions of CFW455 series.

DIMENSIONS (mm)




CIRCUIT



$$R_g + R_1 = R_2 = \text{Input/Output Impedance}$$

1 = INPUT
3,4,5 = GND
2 = OUTPUT


CHARACTERISTICS



MULTI-ELEMENT, ULTRA-MINIATURE, RESIN MOLDED, HIGHLY SELECTIVE CERAMIC FILTERS

CFVM/CFZM 455 KHz

The CFVM 455 line of ceramic filters are 7-element devices connected in ladder form while the CFZM 455 line of filters contain 9-elements. These highly selective filters offer improved stopband attenuation and are recommended for use in a variety of applications.

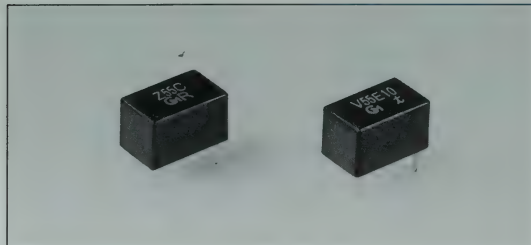


SPECIFICATIONS


CFVM 455 KHz

Part Number	Nominal Center Frequency (KHz)	3dB Bandwidth (KHz) min.	6dB Bandwidth (KHz) min.	Ripple (dB) max.	60dB Bandwidth (KHz) max.	Attenuation (dB) min.	Spurious Response (dB) min.	Insertion Loss (dB) max.	Input/Output Impedance (Ω)
CFVM455B	455	± 10	± 15	3	± 25	50	25	4	1000
CFVM455C	455	± 9	± 13	3	± 23	50	25	4	1000
CFVM455D	455	± 7	± 10	3	± 20	50	25	4	1500
CFVM455E	455	± 5.5	± 8	3	± 16	50	25	6	1500
CFVM455E10	455	± 5.0	± 7.0	3	± 12.5	50	25	6	1500
CFVM455F	455	± 4.2	± 6	3	± 12	50	25	6	1500
CFVM455G	455	-	± 4	3	± 10	50	25	6	1500
CFVM455H	455	-	± 3	3	± 7.5	50	25	6	1500


DIMENSIONS (mm)



CIRCUIT



CHARACTERISTICS




SPECIFICATIONS


CFZM 455 KHz

Part Number	Nominal Center Frequency (KHz)	3dB Bandwidth (KHz) min.	6dB Bandwidth (KHz) min.	Ripple (dB) max.	70dB Bandwidth (KHz) max.	Attenuation (dB) min.	Spurious Response (dB) min.	Insertion Loss (dB) max.	Input/Output Impedance (Ω)
CFZM455B	455	± 10	± 15	3	± 25	70	40	4	1000
CFZM455C	455	± 9	± 13	3	± 23	70	40	4	1000
CFZM455D	455	± 7	± 10	3	± 20	70	40	4	1500
CFZM455E	455	± 5.5	± 8	3	± 16	70	40	6	1500
CFZM455E10	455	± 5.0	± 7.5	3	± 12.5	70	40	6	1500
CFZM455F	455	± 4.2	± 6	3	± 12	70	50	6	1500
CFZM455G	455	-	± 4	3	± 10	70	50	6	1500
CFZM455H	455	-	± 3	3	± 7.5	70	50	7	1500


DIMENSIONS (mm)



CIRCUIT




CHARACTERISTICS



HIGH PERFORMANCE, MULTI-ELEMENT CERAMIC FILTERS



CFM/CFJ/CFR/CFS 455 KHz

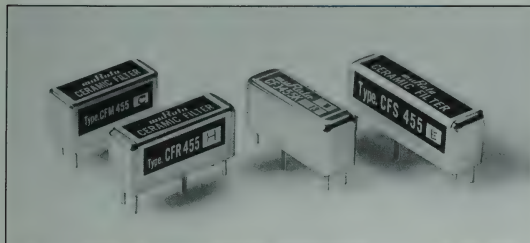

The following lines of filters are high performance devices that achieve ultimate stopband attenuation through the use of multiple piezoelectric elements connected in ladder form. A few of the recommended applications for these filters include high class receivers, SSB communications equipment, pocket pagers, and mobile radios.

CFM 455 9 Ceramic Elements
CFJ 455K 11 Ceramic Elements
CFR 455 11 Element Filters
CFS 455 15 Element Filters


SPECIFICATIONS

CFM/CFJ/CFR/CFS 455 KHz


Part Number	Nominal Center Frequency (KHz)	3dB Bandwidth (KHz) min.	6dB Bandwidth (KHz) min.	Ripple (dB) max.	Bandwidth		Attenuation 455±100KHz (dB) min.	Spurious 0.1 ~ 1MHz (dB) min.	Insertion Loss (dB) max.	Input/Output Impedance (Ω)
					(KHz) max.	AI (dB)				
CFM455A	455	±13	±17.5	3	±30	60	50	30	3	1000
CFM455B	455	±10	±15	3	±25		50	30	3	1000
CFM455C	455	±9	±13	3	±23		50	30	3	1000
CFM455D	455	±7	±10	3	±20		50	30	3	1500
CFM455E	455	±5.5	±8	3	±16		45	30	5	1500
CFM455F	455	±4.2	±6	3	±12		45	30	6	2000
CFM455G	455	-	±4	3	±10		45	30	6	2000
CFM455H	455	-	±3	3	±7.5		45	30	6	2000
CFM455I	455	-	±2	3	±5		45	30	7	2000
CFR455A	455	±13	±17.5	3	±30	70	60	40	4	1000
CFR455B	455	±10	±15	3	±25		60	40	4	1000
CFR455C	455	±9	±13	3	±23		60	40	4	1000
CFR455D	455	±7	±10	3	±20		60	40	4	1500
CFR455E	455	±5.5	±8	3	±16		55	40	6	1500
CFR455F	455	±4.2	±6	3	±12		55	40	6	2000
CFR455G	455	-	±4	3	±10		55	40	6	2000
CFR455H	455	-	±3	3	±7.5		55	40	7	2000
CFR455I	455	-	±2	3	±5		55	40	8	2000
CFR455J	455	-	±1.5	3	±4.5		55	40	8	2000
CFJ455K5	455	-	2.4 (Total)	2	4.5 (Total)	60	-	60 ^{40 at 600 ~ 700KHz}	6	2000
CFJ455K14	455	-	±1.1~±1.3	2	4.5 (Total)		-	60 ^{40 at 600 ~ 700KHz}	7	2000
CFJ455K8	455	-	1.0 (Total)	1.5	3.0 (Total)	80	60	-	8	2000
CFS455A	455	±13	±17.5	3	±30		70	50	4	1500
CFS455B	455	±10	±15	3	±25		70	50	4	1500
CFS455C	455	±9	±13	3	±23		70	50	4	1500
CFS455D	455	±7	±10	3	±20		70	50	4	1500
CFS455E	455	±5.5	±8	3	±15		70	50	6	1500
CFS455F	455	±4.2	±6	3	±12		70	50	6	2000
CFS455G	455	-	±4	3	±9		70	50	6	2000
CFS455H	455	-	±3	3	±7.5		70	50	7	2000
CFS455I	455	-	±2	3	±5		70	50	8	2000
CFS455J	455	-	±1.5	3	±4.5		60	50	8	2000

DIMENSIONS (mm)


CFM 455




CFR 455




CFJ 455K



CFS 455



MULTI-ELEMENT, RESIN MOLDED, G.D.T. FLAT TYPE CERAMIC FILTERS

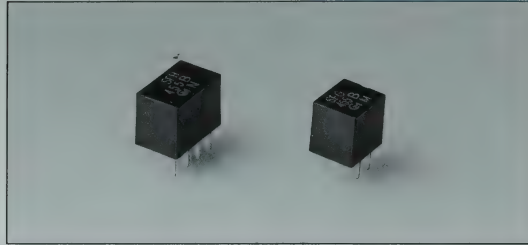

SFG/SFH 455 KHz

The SFG line of ceramic filters are 4-element devices connected in ladder form while the SFH 455 filters contain 6-elements. These highly selective filters are designed to address the G.D.T. characteristics required in digital communications. The excellent G.D.T. characteristics allow these filters to be utilized in areas such as the mobile cellular markets as well as a variety of stereo applications.


SPECIFICATIONS

SFG 455 KHz


Part Number	Nominal Center Frequency (KHz)	6dB Bandwidth (KHz) min.	40dB Bandwidth (KHz) max.	Attenuation 455±100 KHz (dB) min.	Insertion Loss (dB) max.	Input/Output Impedance (Ω)	G.D.T. Tolerance Typ. (μ sec.)*
SFG455B	455±1.5	±15	±35	25(455±80KHz)	5	1500	30(±15KHz)
SFG455C	455±1.5	±12.5	±30	25(455±80KHz)	6	1500	30(±12.5KHz)
SFG455D	455±1.0	±10	±25	23	7	1500	30(±10KHz)
SFG455E	455±1.0	±7.5	±20	23	8	1500	30(±7.5KHz)
SFG455F	455±1.0	±6	±17.5	23	9	2000	20(±6KHz)
SFG455G	455±1.0	±4.5	±15	20	10	2000	20(±4.5KHz)

*Typical value.
Also available at 450 KHz


DIMENSIONS (mm)



CIRCUIT



CHARACTERISTICS




SPECIFICATIONS

SFH 455 KHz


Part Number	Nominal Center Frequency (KHz)	6dB Bandwidth (KHz) min.	50dB Bandwidth (KHz) max.	Attenuation 455±100 KHz (dB) min.	Insertion Loss (dB) max.	Input/Output Impedance (Ω)	G.D.T. Tolerance Typ. (μ sec.)*
SFH455B	455±1.5	±15	±35	35	6	1500	40(±15KHz)
SFH455C	455±1.5	±12.5	±30	35	7	1500	40(±12.5KHz)
SFH455D	455±1.0	±10	±25	35	8	1500	40(±10KHz)
SFH455E	455±1.0	±7.5	±15	35	9	1500	40(±7.5KHz)
SFH455F	455±1.0	±6	±17.5	35	10	2000	40(±6KHz)
SFH455G	455±1.0	±4.5	±15	35	13	2000	40(±4.5KHz)

*Typical value
Also available at 450 KHz


DIMENSIONS (mm)



CIRCUIT




CHARACTERISTICS



MULTI-ELEMENT, ULTRA-MINIATURE G.D.T. FLAT TYPE CERAMIC FILTERS



SFGM/SFHM 455 KHz

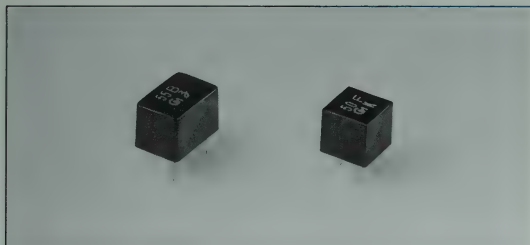

The SFGM/SFHM lines of ceramic filters are miniaturized versions of the SFG/SFH lines. These ultra-miniature versions consume approximately 40% less volume while still offering the same excellent G.D.T. characteristics as the SFG/SFH lines. This reduction in size makes these devices ideal for compact communication applications such as mobile telephones.


SPECIFICATIONS

SFGM 455 KHz


Part Number	Nominal Center Frequency (KHz)	6dB Bandwidth (KHz) min.	40dB Bandwidth (KHz) max.	Attenuation 455 ± 100 KHz (dB) min.	Insertion Loss (dB) max.	Input/Output Impedance (Ω)
SFGM455B	455	± 15	± 35	25	5	1500
SFGM455C	455	± 12.5	± 30	25	6	1500
SFGM455D	455	± 10	± 25	23	7	1500
SFGM455E	455	± 7.5	± 20	23	8	1500
SFGM455F	455	± 6	± 17.5	23	9	2000
SFGM455G	455	± 4.5	± 15	20	10	2000

• SFGM455 series filters are 4-element ceramic filters and ultra-miniature type of SFG455 series.
Also available at 450 KHz


DIMENSIONS (mm)



CIRCUIT



CHARACTERISTICS




SPECIFICATIONS

SFHM 455 KHz


Part Number	Nominal Center Frequency (KHz)	6dB Bandwidth (KHz) min.	50dB Bandwidth (KHz) max.	Attenuation 455 ± 100 KHz (dB) min.	Insertion Loss (dB) max.	Input/Output Impedance (Ω)
SFHM455B	455	± 15	± 35	35	6	1500
SFHM455C	455	± 12.5	± 30	35	7	1500
SFHM455D	455	± 10	± 25	35	8	1500
SFHM455E	455	± 7.5	± 20	35	9	1500
SFHM455F	455	± 6	± 17.5	35	10	2000
SFHM455G	455	± 4.5	± 15	35	13	2000

• SFHM455 series filters are 6-element ceramic filters and ultra-miniature type of SFH455 series.
Also available at 450 KHz


DIMENSIONS (mm)



CIRCUIT




CHARACTERISTICS



CERAMIC DISCRIMINATORS FOR COMMUNICATIONS EQUIPMENT

CDB 455 KHz

The CDB 455 ceramic discriminators are constructed of wide-band piezoelectric elements that allow for adjustment free audio detection. These IC specific devices are utilized in various communications equipment for wide band use.

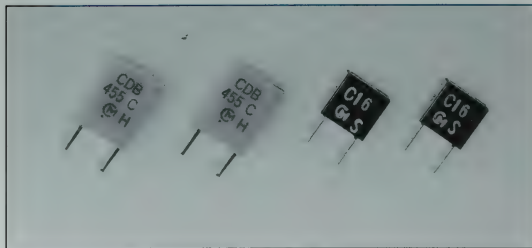


SPECIFICATIONS

CDB 455 SERIES


Part Number	Demodulation 3dB Bandwidth	Demodulation Output (455KHz)	Distorsion Factor (455KHz)	Impedance Char.				
				Resonant Freq. Fr	Antiresonant Freq. Fa	ΔF (Fa-Fr)	Resonant Resistance R1	Capacitance C
CDB455C3	—	—	—	—	455 $\pm$ 1.5KHz	48 $\pm$ 5KHz	70 Ω max.	600pF $\pm$ 20%
CDB455C7	$\pm$ 4.0KHz min.	340 $\pm$ 60mV	2.5% max.	—	—	—	—	—
CDB455C9	$\pm$ 5.0KHz min.	100mV min.	1.5% max.	—	—	—	—	—
CDB455C10	—	—	—	429 $\pm$ 2.0KHz	—	46KHz min.	70 Ω max.	580pF $\pm$ 20%
CDBM455C4	—	—	—	—	470 $\pm$ 1.0KHz	43 $\pm$ 2.0KHz	300 Ω max.	140pF $\pm$ 20%
CDBM455C16	$\pm$ 4.0KHz min.	190 $\pm$ 50mV	2.0% max.	—	—	—	—	—
CDBM455C3	—	—	—	—	455 $\pm$ 1.5KHz	46 $\pm$ 5.0KHz	70 Ω max.	550pF $\pm$ 20%
CDBM455C7	$\pm$ 4.0KHz min.	340 $\pm$ 60mV	3.0% max.	—	—	—	—	—
CDBM455C18	$\pm$ 3KHz	180 $\pm$ 40mV	2%	—	—	—	—	—

DIMENSIONS (mm)


CDB455C3/7/9/10



CDBM455C4/16



CDBM455C3/7




IC COMPATIBILITY

Part Number	IC Maker	IC Number	Note 1	Note 2	Part Number	IC Maker	IC Number	Note 1	Note 2
CDB455C3	SONY	CXA 1183	*		CDB455C10	TOSHIBA	TA81035		
CDB455C4	SANYO	LA 8610	*		CDB455C11	SIEMENS	S1469		
CDB455C5	NEC	UPC1167C		*	CDB455C12	PLESSY	SL6652		
CDB455C7	MOTOROLA	MC3357	*	*	CDB455C13	SONY	CXP1003	*	
CDB455C8	PHILLIPS	TDA1576		*	CDB455C16	MOTOROLA	MC3372	*	
CDB455C9	SIGNETICS	NE604/5	*	*					

* NOTE 1 ALSO AVAILABLE IN MINIATURE SIZE
* NOTE 2 ALSO AVAILABLE IN 450 KHz

* CDB455 Series/CDBM455 Series (for quadrature detection)

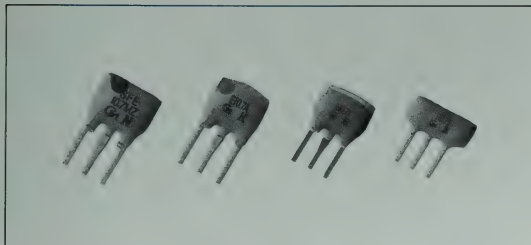

Murata Erie's MHz series of ceramic filters are monolithic devices which utilize the energy-trapped thickness vibration-mode. This principle of operation is based upon the fact that an excellent resonating element with low spurious vibration can be obtained by adhering to certain theoretical parameters of design. These parameters include the physical dimensions of the ceramic element, the electrode pattern, and the associated mass loading effect of the electrodes.

In addition to employing the principle of energy-trapped thickness shear vibration-mode, Murata also utilizes the theory of the multicoupling mode. In short, this theory utilizes divided electrodes to "trap" different frequencies simultaneously.

The advantages of Murata Erie's multicoupling mode technology is a highly selective, integrated ceramic filter that allows a single ceramic substrate to contain a number of coupled resonators.

Murata Erie categorizes the SFE 10.7 family of ceramic filters according to rank of center frequency. This ranking indicates that a given SFE 10.7 filter will be marked with one of the colors listed in the following chart and will exhibit the center frequency characteristics specified below.

CENTER FREQUENCY DEFINITIONS

Color Code	Category	Center Frequency (MHz) $\pm 30\text{KHz}$ (Tolerance)
BLACK	D	10.64
BLUE	B	10.67
RED	A	10.70
ORANGE	C	10.73
WHITE	E	10.76
RED, BLUE, ORANGE, BLACK OR WHITE	Z	Combination A. B. C. D. E.
RED, BLUE OR ORANGE	M	Combination A. B. C.

Example—An application calls for a band pass filter centered at 10.7 MHz with a ± 30 KHz center frequency tolerance. If a 180 ± 40 KHz 3 dB bandwidth is suitable, then the Murata Erie part number would be: SFE 10.7MS3-A


Note—This method of categorizing center frequency only applies to the 10.7 MHz filters that are followed by the -Z designation on the following pages. Part numbers that are not followed by the -Z designation are available only at 10.7MHz center frequency.

Note—The above chart should be used only as a guide for identifying the color code marking on Murata Erie filters. Murata Erie recommends that engineers incorporate either the -A (center of distribution) or -Z (total distribution) designation into their designs. This recommendation is based on product availability.

LOW LOSS, HIGHLY SELECTIVE, MINIATURE CERAMIC FILTERS

SFE MA/MS/MJ 10.7 MHz

The standard SFE 10.7 line of ceramic filters are extremely reliable devices that exhibit excellent waveform symmetry. These filters have traditionally found wide application in FM receiver technology.

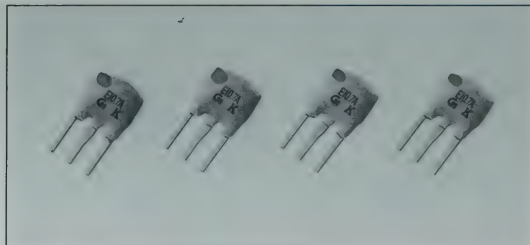

SPECIFICATIONS


SFE MA/MS/MJ 10.7 MHz

Part Number	3dB Bandwidth (KHz)	20dB Bandwidth (KHz) max.	Insertion Loss (dB)	Spurious Attenuation (9 to 12MHz) (dB) min.
SFE10.7MA5-Z	280±50	650 (520)	6 (4)	30 (43)
SFE10.7MS2-Z	230±50	570 (420)	6 (4)	40 (5)
SFE10.7MS3-Z	180±40	520 (380)	7 (4.5)	40 (5)
SFE10.7MJ-Z	150±40	400 (300)	10 (5)	40 (5)


Input/output matching impedance: 330 Ω

() Typ. value

DIMENSIONS (mm)



CIRCUIT




$$R_1 + R_2 = 330\Omega \pm 5\%$$

$C = 10 \text{ pF}$
(including stray capacitance and input capacitance of RF Voltmeter)

1 = INPUT
2 = GND
3 = OUTPUT

FREQUENCY CHARACTERISTICS

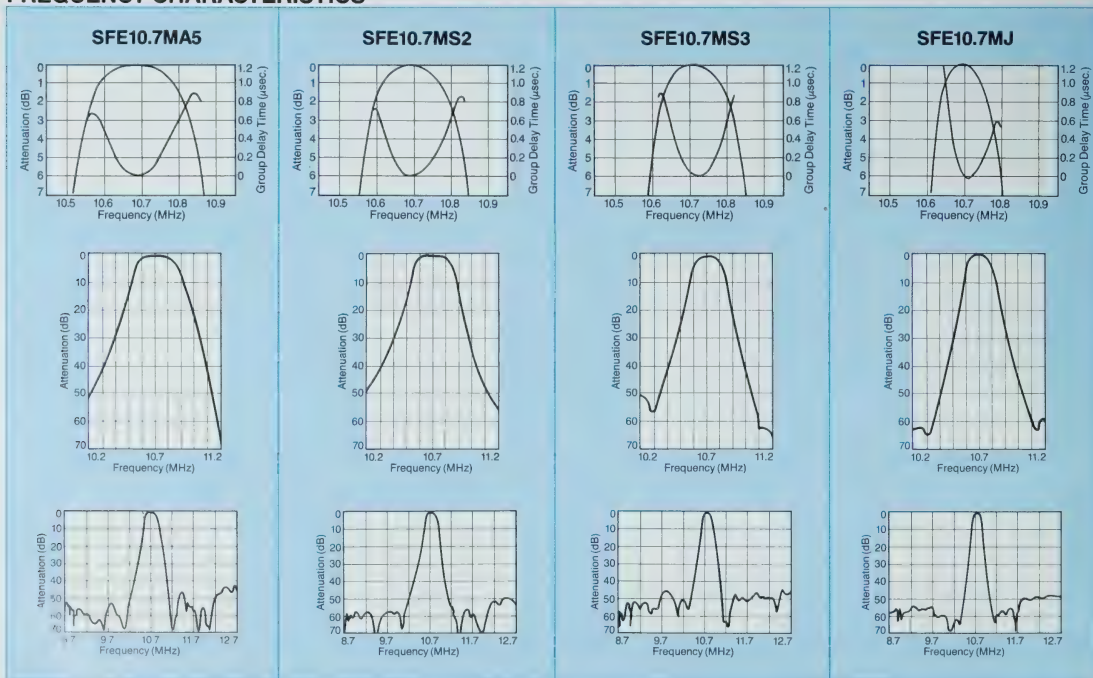

HIGHLY SELECTIVE, G.D.T. FLAT TYPE CERAMIC FILTERS



SFE MX/MA8 10.7 MHz

The SFE 10.7MX/MA8 lines of ceramic filters were designed to minimize the dispersion of amplitude and phase characteristics within the pass band. Because the excellent G.D.T. characteristics of these filters insure signal integrity, they are recommended for use in applications ranging from high grade stereo receivers to digital transmission systems.

SPECIFICATIONS

SFE MX/MA8 10.7 MHz


	Part Number	3db Band Width (KHz)	20dB Band Width (KHz) max.	Insertion Loss (dB) max.	Spurious Attenuation min.	G.D.T. Band Width (KHz) min.
MX series	SFE10.7MX-Z	250±40	670(620)	12(10)	25(33)	0.2μ sec. max. Within ± 110KHz
	SFE10.7MX2-Z	220±40	610(560)	12.5(10.5)	30(37)	0.15μ sec. max. Within ± 80KHz
	SFE10.7MZ1-Z	180±30	530(460)	14(12.3)	33(38)	0.15μ sec. max. Within ± 60KHz
	SFE10.7MZ2-Z	150±30	500(420)	14(12.6)	35(41)	0.15μ sec. max. Within ± 50KHz
MA8 series	SFE 10.7MA8-Z	280±50	650(520)	6(4)	30(43)	0.5μ sec. max. Within ± 80(100)KHz
	SFE10.7MS2G-Z	230±50	600(420)	7(4.5)	40(45)	0.5μ sec. max. Within ± 60(75)KHz
	SFE10.7MS3G-Z	180±40	520(380)	9(5)	40(45)	0.5μ sec. max. Within ± 45(60)KHz

• Input/output matching impedance: 330

() Typ. value


DIMENSIONS (mm)

SFE10.7MX




DIMENSIONS (mm)

SFE10.7MA8



CIRCUIT




1=INPUT
2=GND
3=OUTPUT


FREQUENCY CHARACTERISTICS

MX Series


SFE10.7MX




SFE10.7MX2



SFE10.7MZ1




SFE10.7MZ2




MA8 Series


SFE10.7MA8




SFE10.7MS2G



SFE10.7MS3G



LOW LOSS, WIDE OR NARROW BAND, MINIATURE CERAMIC FILTERS

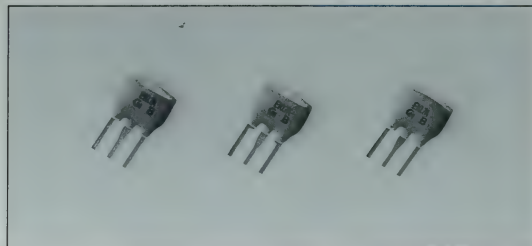

SFE MA/MH 10.7 MHz

The following filters were developed to offer both narrower and wider band width characteristics for use in products such as DBS receivers. These filters also retain the same reliability that is available with our standard filters. The various band widths allow these filters to be utilized in a multitude of new communication applications.

SPECIFICATIONS


SFE MA/MH 10.7 MHz

Part Number	3dB Bandwidth (KHz)	20dB Bandwidth (KHz) max.	Insertion Loss (dB)	Spurious Attenuation (9 to 12MHz) (dB) min.	Input/Output Matching Imp.
SFE10.7MA19	350min. (450)	950 (750)	3±2	20 (30)	470 Ω
SFE10.7MA20-A	330±50	680 (615)	4±2	30 (40)	330 Ω
SFE10.7MA21	400 (500)	950 (750)	3±2	20 (30)	470 Ω
SFE10.7MHY-A	110±30	350 (260)	7±2	30 (42)	330 Ω

NOTE: These filters are not classified according to center frequency.

() Typ. value


DIMENSIONS (mm)



P/N	W	H	T
MA19	9.0	9.0	4.0
MA20-A	Max.	Max.	Max.
MA21	7.0	7.0	3.0
MHY-A	±2.0	±2.0	±1.0

$R_g + R_1 = R_2 = \text{Input/Output Impedance}$

CIRCUIT




$R_g + R_1 = R_2 = \text{Input/Output Impedance}$
 $C = 10 \text{ pF}$
 (including stray capacitance and input capacitance of RF Voltmeter)


1 = INPUT
 2 = GND
 3 = OUTPUT

FREQUENCY CHARACTERISTICS

SFE10.7MA19




SFE10.7MH



HIGHLY SELECTIVE, 3 STAGE TYPE CERAMIC FILTERS



SFT MA/MS 10.7 MHz

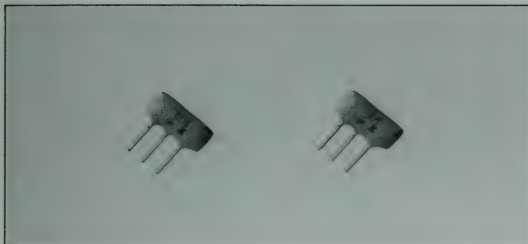

The SFT 10.7 ceramic filters are single substrate, 3 element devices that offer 1.5 times more selectivity than the conventional SFE series of filters. The improved spurious suppression of these filters eliminates the need for cascading multiple filtering devices; therefore, it is possible to design a more compact circuit board configuration.

SPECIFICATIONS


SFT MA/MS 10.7 MHz

Part Number	3dB Bandwidth (KHz)	20dB Bandwidth (KHz) max.	Insertion Loss (dB)	Spurious Attenuation (9 to 12MHz) (dB) min.
SFT10.7MA5-Z	280 $\pm$ 50	700 (630)	6 $\pm$ 2	50 (60)
SFT10.7MS2-Z	230 $\pm$ 40	650 (580)	6 $\pm$ 2	50 (60)
SFT10.7MS3-Z	180 $\pm$ 40	550 (500)	8 $\pm$ 2	50 (60)


*Input/Output impedance: 330 Ω

() Typ. value

DIMENSIONS (mm)




CIRCUIT




FREQUENCY CHARACTERISTICS


SFT10.7MS2




SFT10.7MS3




SFT10.7MS3




SFT10.7MS3




SFT10.7MS2



SFT10.7MS3




TYPICAL SPURIOUS
RESPONSE CHARACTERISTICS
SFT10.7MS2



CERAMIC DISCRIMINATORS FOR FM DEMODULATION

CDA 10.7 MHz

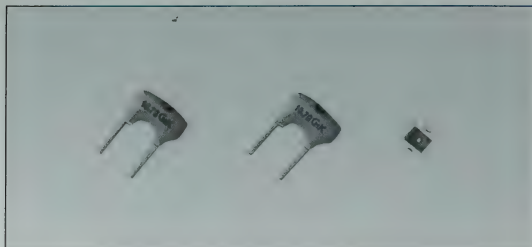

The CDA 10.7 line of ceramic discriminators are resonate devices that offer adjustment free audio detection in both wide and narrow bandwidths. These IC dependent devices utilize FM specific detection methods to convert changes in frequency into an intelligible audio signal.


Part Number	IC Mfg.	IC Number	Part Number	IC Mfg.	IC Number
CDA10.7MC2-A	Toshiba	TA7687P/F	CDA10.7MG17-A	Phillips	TEA5591
CDA10.7MC3-A	National	AN7220A	CDA10.7MG18-A	Toshiba	TA8132N
CDA10.7MC4-A	Motorola	MC3356P	CDA10.7MG19-A	Rohm	BA1440
CDA10.7MC5-A	Sanyo	LA7770	CDA10.7MG20-A	Signetics	NE604
CDA10.7MC6-A	Phillips	TEA5591	CDA10.7MG21-A	Siemens	TBA229-2
CDA10.7MC7-A	Sanyo	LA1811	CDA10.7MG22-A	Sanyo	LA1810
CDA10.7MC19-A	Rohm	BA1440	CDA10.7MG23-A	Sanyo	LA7770
CDA10.7MC30-A	Phillips	TEA5592	CDA10.7MG24-A	Phillips	TDA2557
CDA10.7MF1A-A	National	AN7223	CDA10.7MG26-A	Sanyo	LA1805
CDA10.7MF2A-A	National	AN7222	CDA10.7MG28-A	Telefunken	U2510B
CDA10.7MF3-A	Hitachi	HA12413	CDA10.7MG30-A	Phillips	TEA5392
CDA10.7MF4-A	National	AN7221	CDA10.7MA4-A	Sanyo	LA1235
CDA10.7MF5-A	Hitachi	HA12430	CDA10.7MA5A-A	RCA	CA3089E
CDA10.7MF6-A	Toshiba	TA7747P	CDA10.7MA12-A	NEC	uPC1167C
CDA10.7MF7-A	Toshiba	TA7704P	CDA10.7MA14-A	Mitsubishi	M51173AP
CDA10.7MG1-A	Sony	CXA-1238/20111	CDA10.7MA15-A	Sanyo	LA1231N
CDA10.7MG2-A	Sony	CX-831	CDA10.7MA16-A	Hitachi	HA12411
CDA10.7MG4-A	Rohm	BA4234L	CDA10.7MA17-A	N.S.	LM3189N
CDA10.7MG6-A	Toshiba	TA7640AP	CDA10.7MA18K-A	Sanyo	LA1265
CDA10.7MG7-A	Sanyo	LA1260	CDA10.7MA19-A	Hitachi	HA1137W
CDA10.7MG8-A	Toshiba	TA7303P	CDA10.7MA19A-A	Hitachi	HA1137W
CDA10.7MG9-A	Toshiba	TA7130P	CDA10.7MA20-A	Siemens	TBA120T
CDA10.7MG12-A	Sony	CXA1030P	CDA10.7MA21-A	Siemens	TDA4282T
CDA10.7MG13-A	National	AN7007SU	CDA10.7MA22-A	RCA	CA3209
CDA10.7MG14A-A	National	AN7006S	CDA10.7MA23-A	Sanyo	LA1140
CDA10.7MG15-A	Sanyo	LA1816	CDA10.7MA25-A	Hitachi	HA11225
CDA10.7MG16-A	Toshiba	TA8122AN	CDA10.7MA27-A	NEC	uPC1382C

NOTE: The CDA 10.7 line of ceramic discriminators is categorized according to center frequency in the same manner as 10.7MHz Filters (refer to pg. 15.)


SURFACE MOUNT CERAMIC DISCRIMINATORS

Part Number	IC Mfg.	IC Number
CDAC10.7MG1-A	Sony	CX-20029
CDAC10.7MG2-A	Sony	CX-20076
CDAC10.7MG18-A	Toshiba	TA8132F
CDAC10.7MG20-A	Signetics	NE-604


LEADED DIMENSIONS



SURFACE MOUNT DIMENSIONS



TYPICAL CIRCUIT




HIGHLY ACCURATE, TV/VCR TYPE CERAMIC FILTERS



SFE/SFS 3.58-6.5 MHz

The SFE/SFS lines of ceramic filters are high quality devices designed to address the TV/VCR/CATV/DBS markets. The SFE/SFS lines are utilized as IF filters in virtually every type of technology currently used in the television industry.

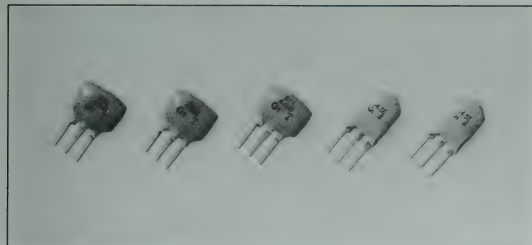


SPECIFICATIONS

SFE 3.58-6.5 MHz


Part Number	Nominal Frequency	3dB Bandwidth (KHz) min.	20dB Bandwidth (KHz) max.	Insertion Loss (dB) max.	Stop Band Attenuation (dB) min.	Input/Output Matching Imp.
SFE3.58MBF	3.58MHz	$\pm 40 (\pm 80)$	530 (370)	10 (5)	17 (Within 3.58 ± 0.5 MHz)	1 K Ω
SFE4.5MBF	4.5MHz	$\pm 60 (\pm 105)$	530 (420)	6 (4)	20 (Within 4.5 ± 0.8 MHz)	1 K Ω
SFE5.5MBF	5.5MHz	$\pm 75 (\pm 120)$	550 (470)	6 (3)	25 (Within 5.5 ± 1.0 MHz)	600 Ω
SFE6.0MBF	6.0MHz	$\pm 80 (\pm 130)$	600 (500)	6 (2.5)	25 (Within 6.0 ± 1.0 MHz)	470 Ω
SFE6.5MBF	6.5MHz	$\pm 80 (\pm 130)$	630 (530)	6 (2.5)	25 (Within 6.5 ± 1.0 MHz)	470 Ω

() Typ. value


DIMENSIONS (mm)



CIRCUIT



CHARACTERISTICS



SPECIFICATIONS


SFS 4.5 MHz

Part Number	Nominal Center Frequency	3dB Bandwidth (KHz) min.	20dB Bandwidth (KHz) max.	Insertion Loss (dB) max.	Stop Band Attenuation (dB) min.	Input/Output Matching Imp.
SFS4.5MC	4.5MHz	$\pm 60 (\pm 110)$	600 (420)	6 (3.5)	30 (0 to 4.5MHz)	1 K Ω
SFS4.5MD	4.5MHz	$\pm 70 (\pm 140)$	750 (530)	6 (2.8)	30 (0 to 4.5MHz)	1 K Ω
SFS4.5ME2	4.5MHz	$\pm 110 (\pm 160)$	750 (700)	6 (3.5)	30 (0 to 4.5MHz)	600 Ω


5.5, 6.0 6.5KHz types are also available.

() Typ. value


DIMENSIONS (mm)



CIRCUIT




CHARACTERISTICS



HIGH ATTENUATION CERAMIC TRAPS

TPS MJ/MB 4.5-6.5 MHz

The TPS MJ/MB lines of ceramic traps are band reject filters used for video and sound IF attenuation. The 2 terminal TPS MJ series can be used to attenuate either the sound signal in B/W receivers or the chroma signal in video. The 3 terminal TPS MB series contains 2 trap elements on one substrate for additional attenuation. This line of traps can be used in the sound IF of CATV/VCR receivers.

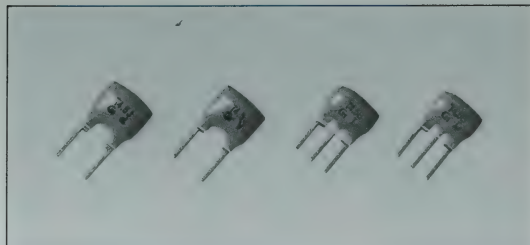


SPECIFICATIONS

TPS MJ 4.5-6.5 MHz


Part Number	Nominal Center Frequency (fn)	Attenuation at fn (dB) min.	20dB Attenuation Bandwidth (KHz) min.	Spurious Response (0 to fn) (dB) max.
TPS4.5MJ	4.5MHz	20 (30)	30 (50)	0.5 (0)
TPS5.5MJ	5.5MHz	20 (30)	30 (60)	0.5 (0)
TPS6.0MJ	6.0MHz	20 (30)	30 (70)	0.5 (0)
TPS6.5MJ	6.5MHz	20 (30)	30 (70)	0.5 (0)
TPS3.58MJ	3.58MHz	20 (27)	20 (30)	0.5 (0)
TPS4.43MJ	4.43MHz	20 (30)	20 (50)	0.5 (0)

() Typ. value


DIMENSIONS (mm)



CIRCUIT



CHARACTERISTICS



SPECIFICATIONS


TPS MB 4.5-6.5 MHz

Part Number	Nominal Center Frequency (fn)	Attenuation at fn (dB) min.	30dB Attenuation Bandwidth (KHz) min.	Spurious Response (0 to fn) (dB) max.
TPS4.5MB2	4.5MHz	35 (45)	50 (80)	0.5 (0)
TPS5.5MB	5.5MHz	35 (45)	70 (120)	0.5 (0)
TPS6.0MB	6.0MHz	35 (45)	70 (120)	0.5 (0)
TPS6.5MB	6.5MHz	35 (45)	70 (120)	0.5 (0)


The level at 1 MHz shall be made for a reference (0dB)
Other frequencies (3.58, 4.43 MHz) are also available.

() Typ. value

DIMENSIONS (mm)





CIRCUIT



CHARACTERISTICS

TPS4.5 (4.5±0.5MHz.)



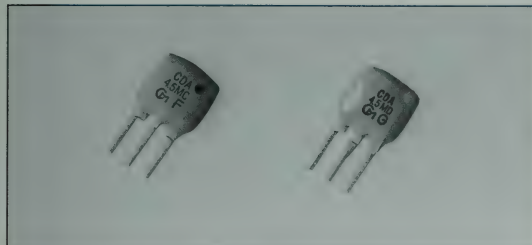

CDA MC/ME 4.5-6.5 MHz


The CDA MC/ME lines of ceramic discriminators are IC dependent devices used in the recovery of audio signals. The CDA MC discriminators have three terminals while the CDA ME discriminators are 2 terminal devices.

MATCHING IC

Part Number	IC	Part Number	IC	Part Number	IC
CDA□MC10	TBA120T	CDA□MC22	M51354AP	CDA□MC30	M51348FP
CDA□MC15	TA7146P	CDA□MC23	M51316P	CDA□MC31	TDA4282T
CDA□MC16	TDA4940	CDA□MC24	LA7520	CDA□MC32	LA7522
CDA□MC17	TDA4280	CDA□MC25	LA7521	CDA□MC33	μPC1416G
CDA□MC18	HA11229	CDA□MC26	LA7530 (N)	CDA□MC34	TBA130-2
CDA□MC19	μPC1391H	CDA□MC27	μPC1411CA	CDA□MC35	M51345FP
CDA□MC20	μPC1382C	CDA□MC28	M51316BP		
CDA□MC21	μPC1383C	CDA□MC29	M51365SP		


□ Indicates frequency 4.5/5.5/5.74/6.0/6.5 MHz are available. Note that part numbers, circuit and ratings vary according to the IC used at detector process.

DIMENSIONS (mm)



CIRCUIT


CDA 4.5 MC20

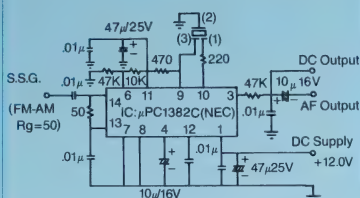

(1) = INPUT
(2) = GND
(3) = OUTPUT

RECOVERED AUDIO CHARACTERISTICS

CDA 4.5 MC20




Test Conditions = 100 dBV
400 H₂, ±7.5 KHz Dev.

MATCHING IC

Part Number	IC	Part Number	IC	Part Number	IC
CDA□ME1	CX-20014	CDA□ME8	TBA129	CDA□ME23	M51496P
CDA□ME2	AN5135	CDA□ME10	TDA2546A	CDA□ME27	LA7650
CDA□ME3	TA7678AP	CDA□ME19	M51346BP	CDA□ME30	CXA1110AS
CDA□ME5	AN5135NK	CDA□ME20	LA7550	CDA□ME34	TA8680N
CDA□ME6	M51346AP	CDA□ME21	LA7545	CDA□ME35	LA7680
CDA□ME7	TDA4503	CDA□ME22	TDA2556	CDA□ME37	TA8691N


☐ Indicates frequency 4.5/5.5/5.74/6.0/6.5MHz are available. Note that part numbers, circuits and ratings vary according to the IC used at detector process.

DIMENSIONS (mm)




CIRCUIT

CDA 4.5 ME20

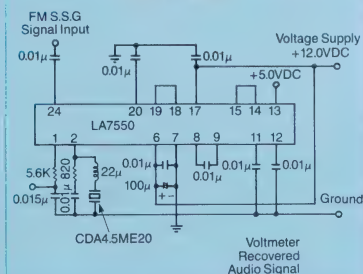

RECOVERED AUDIO CHARACTERISTICS

CDA 4.5 ME20




Test Conditions = 100 dBV
400 H₂, ±7.5 KH₂ Dev

CERAMIC FILTERS FOR SIGNAL DETECTION

SFE & BFU Series

The following filters were specifically designed for signal detection circuitry used in applications such as that found in the search-stop functions of electronically tuned radios.

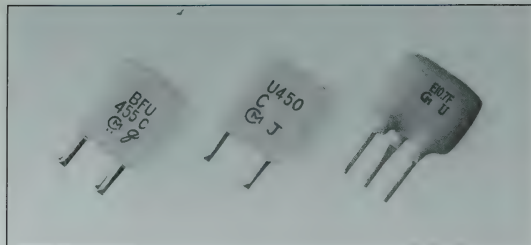


SPECIFICATIONS


SFE 10.7

Part Number	Center Freq. (MHz)	3dB Bandwidth (KHz)	Insertion Loss (dB max)	Terminal Impedance (Ω)
SFE10.7MFP1	10.7 (Nominal)	$F_n \pm 5$ min. $F_n \pm 35$ max.	6	600

DIMENSIONS (mm)



CIRCUIT

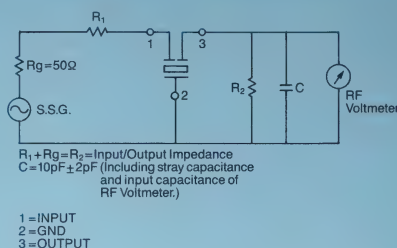

SPECIFICATIONS

BFU 450/455


Part Number	Resonant Frequency (KHz)	Resonant Resistance (Ω)	$\Delta f(f-f_r)$ (KHz)
BFU450K3	450 ± 1	30	27.5 ± 4
BFU450C	450 ± 1	20	14 ± 2
BFU450C4N	450 ± 0.8	30	9 ± 2

• Temperature Coefficient is typically 10ppm/°C

Part Number	Center Frequency (KHz)	3dB Bandwidth (KHz)	Selectivity
BFU455K	455 ± 2	8 ± 2	8db @ $f_0 = -9$, 12db @ $f_0 = +9$


DIMENSIONS (mm)

BFU450K3/C/C4N




DIMENSIONS (mm)

BFU455K




CIRCUITS

BFU450K3/C/C4N




BFU455K



SFU & SFZ Series

The following filters were designed to address the needs of standard AM filtering requirements. These filters are recommended for use in low cost products where economically, efficient designs are critical.

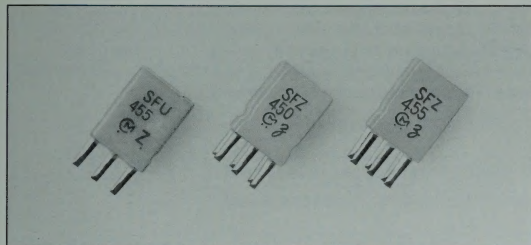


SPECIFICATIONS

SFU/SFZ/450/455


Part Number	Center Freq. (KHz)	3dB Bandwidth (KHz)	Ripple (dB) max.	Selectivity (dB) min.	Termination Impedance (ohms) max.	Spurious Response (dB) min.	Insertion Loss (dB) max.	Operating Temperature Range	Withstanding Voltage
SFU455A	455±2	10 (±3)	0	6@-10KHz 4@+10KHz	3K	10 (1-3MHz)	5	-10°C to +80°C	50V DC
SFU455B (connected to an IFT)	462±2	10 (±3)	-	4@+10KHz 6@-10KHz	3K	10 (1-3MHz)	5	-10°C to +80°C	
SFZ455A	455±2	4.5 (±1)	1.5	26@-10KHz 20@+10KHz	3K	20 (1-3MHz)	6	-20°C to +80°C	
SFZ455B	455±2	6.5 (±1)	1.5	14@+9KHz 18@+9KHz	3K	20 (0-3MHz) 10 (3-15MHz)	6	-20°C to +80°C	
SFZ450C3N	450±1	2.5 (±1)	-	30@-9KHz 24@+9KHz	3K	F ₀ 20 (1-3MHz)	6.5	-10°C to +80°C	

() Typ. value


DIMENSIONS (mm)




CIRCUIT




DIMENSIONS (mm)




CIRCUIT



DIMENSIONS (mm)




CIRCUIT



SURFACE MOUNTED CHIP PIEZOELECTRIC CERAMIC FILTERS FOR AM AND FM APPLICATIONS

SFGCC 455KHz/SFEC10.7 MA

Along with the development of the AM chip filter, IF filters for AM/FM radios have also been made smaller, thinner and in a chip configuration for surface mounting. This is one more example of Murata Erie's leadership in converting conventional electronic components to chip technology.

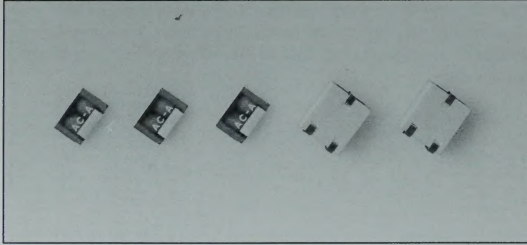


PRELIMINARY SPECIFICATIONS

SFGCC 455 KHz

Part Number	Center Frequency		Bandwidth			Ripple (max)		*Insertion Loss (max) dB	Stop Band Atten. (min) at ± 100 KHz dB	Group Delay (max)		Source And Load Impedance K Ω
	Nom. (KHz)	Tol. (KHz)	3dB (min) (KHz)	6dB (min) (KHz)	40dB (min) (KHz)	dB	Point of Measure			μ s	Point of Measure	
SFGCC455AX2	455	-	28	-	70	1.0	± 10 KHz	5.0	25	15	± 10 KHz	1.0
SFGCC455BX	455	1.5	-	30	70	1.0	± 10 KHz	5.0	25	15	± 10 KHz	1.0
SFGCC455CX	455	1.5	-	25	60	1.0	± 8 KHz	6.0	25	15	± 8 KHz	1.0
SFGCC455DX	455	1.0	-	20	50	1.0	± 7 KHz	7.0	23	20	± 7 KHz	1.5
SFGCC455EX	455	1.0	-	15	40	1.0	± 5 KHz	8.0	23	20	± 5 KHz	1.5
SFGCC455FX	455	1.0	-	12	35	1.0	± 4 KHz	9.0	23	25	± 4 KHz	1.5
SFGCC455GX	455	1.0	-	9	30	1.0	± 3 KHz	10.0	20	25	± 3 KHz	1.5

Note: Also available as CFU equivalent

DIMENSIONS (mm)



SPECIFICATIONS

SFEC10.7MA5P/MS2/MS3


Center frequency (f_0)

- A: 10.70MHz ± 30 KHz (red)
- B: 10.67MHz ± 30 KHz (blue)
- C: 10.73MHz ± 30 KHz (orange)
- D: 10.64MHz ± 30 KHz (black)
- E: 10.76MHz ± 30 KHz (white)


The center point of 3dB bandwidth around the center frequency and identified by the colors as shown

	SFEC10.7MA5P-Z	SFEC10.7MS2-Z	SFEC10.7MS3-Z
3dB bandwidth	280 KHz ± 50 KHz	230 KHz ± 50 KHz	180 KHz ± 40 KHz
Insertion loss	5dB max.	6.5dB max.	4.5dB max.
Spurious attenuation	25dB min. (9 to 12MHz)	30dB min. (8 to 13MHz)	30dB min. (8 to 13MHz)
I/O match impedance	330 Ω	330 Ω	330 Ω


DIMENSIONS (mm)



DIMENSIONS (mm) TAPE

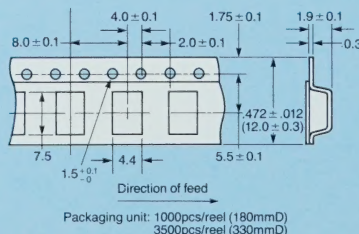

CHARACTERISTICS



MECHANICAL

TEST ITEM	TEST CONDITIONS	TEST METHOD
Terminal Strength	Axial direction: 1Kg load for 5-10 seconds.	MIL-STD-202E Method 211A
Solderability	Parts are immersed for 5 ± 1 seconds at $230\pm 5^{\circ}\text{C}$.	MIL-STD-202E Method 208C
Random Drop	Drop 3 times on concrete floor from 1.0 meter, (30cm for some products).	
Vibration	Vibration amplitude of 1.5mm at 10-55 Hz in each of three mutually perpendicular directions for 1 hour.	MIL-STD-202E Method 201A

ENVIRONMENTAL

TEST ITEM	TEST CONDITIONS	TEST METHOD
Salt Spray	Hold in chamber with 5% salt density at $35^{\circ}\text{C}+1.1^{\circ}\text{C}/-1.7^{\circ}\text{C}$ for 48 hrs. Measure after exposure to room conditions for 1 hour.	MIL-STD-202E Method 101D
Temperature Cycling	Expose to 5 cycles of -55°C (30 minutes), $\rightarrow +25^{\circ}\text{C}$ (15 minutes), $\rightarrow +85^{\circ}\text{C}$ (30 minutes), $\rightarrow +25^{\circ}\text{C}$ (15 minutes). Test after 1 hour exposure to room conditions.	MIL-STD-202E Method 102A
Humidity	Hold in chamber with 90 to 95% R.H. at $40\pm 2^{\circ}\text{C}$ for 100 hours. Test after exposure to room conditions for 1 hour.	MIL-STD-202E Method 103B
Operating Humidity	Hold in chamber with 90 to 95% R.H. at $40\pm 2^{\circ}\text{C}$ for 100 hours at 6VDC. Test after exposure to room conditions for 1 hour.	
Thermal Shock	Expose to 5 cycles of -55°C (30 minutes), $\rightarrow +85^{\circ}\text{C}$ (30 minutes). Test after 1 hour exposure to room conditions.	MIL-STD-202E Method 107D
Life Test	Hold in chamber at $85\pm 2^{\circ}\text{C}$ for 100 hours. Test after exposure to room conditions for 1 hour.	MIL-STD-202E Method 108A
Operating Life Test	Hold in chamber at $85\pm 2^{\circ}\text{C}$ for 100 hours at 6VDC. Test after exposure to room conditions for 1 hour.	
Sulfuration	Hold in chamber with 1000 ppm sulfur density for 24 hours. Test after exposure to room conditions for 1 hour.	
Resistance to Soldering Heat	Immerse leads completely in solder bath at $350\pm 5^{\circ}\text{C}$ for 3 seconds. Test after exposure to room conditions for 1 hour.	MIL-STD-202E Method 210A

ELECTRICAL

TEST ITEM	TEST CONDITIONS	TEST METHOD
Dielectric Withstanding Voltage	Apply 100VDC between I/O terminals and ground terminal, for 1 minute.	MIL-STD-202E Method 301
Insulation Resistance	Apply 100VDC between I/O terminals and ground terminal, for 1 minute.	MIL-STD-202E Method 302
Temperature Characteristic	Hold part for 20 minutes at each of the following temperatures and then measure. -20°C , 0°C , 20°C , 40°C , 60°C , 80°C .	



MURATA ERIE NORTH AMERICA

® 2200 Lake Park Drive
Smyrna, Georgia 30080
Tel: 404-436-1300
Telex: 26-1301
Panafax: 404-436-3030

Regional Sales Offices:

Northeast	— 617- ~~245-7880~~ ³⁵⁶⁻⁴¹⁵⁵	Southwest	— 714-832-9972
Southeast	— 407-644-0954	Northwest	— 503-646-4973
Mid-Atlantic	— 301-494-0405	Western	— 818-701-9702

Corporate Address: 2200 Lake Park Drive, Smyrna, GA 30080 (404-436-1300)